



Catalog

- 1. Product Summary.....3
- 2. Product Character.....3
- 3. Product Picture.....4
- 4. Electric Parameter.....5
- 5. Product Measurement.....6
- 6. Connection.....7
- 7. Operation Guidance.....8
- 8. Warranty.....9
- 9. Attention Items.....10


1. Product Summary

8S Life Po4 24V60A is product designed and developed by Sonikcell Electronics Co/.Ltd for mobile Lithium battery, it is widely used to 8S lithium battery pack, Life Po4 Battery. The BMS is functioned to prevent lithium battery from over charging, over discharging, short circuit, and it helps voltage balance.

2. Product charaters

- Adopt Japan premium IC in class A protection.
- Strong load capacity, continous high discharging current, adopt MOSFET which is in high voltage resistance and low conduct inner resistance, with dissipation to prevent over heat.
- IC is with voltage balance funtion, which function is simple and reliable and current balance can be made by adjustment.
- it is voltage detection to realize protection of over charging and discharging, over current, short circuit, the function of short circuit is stable and reliable, long time of loading in short circuit will not impact to BMS and core battery.
- proper temp control in charging and discharging.
- Well sealed detection resistance with high power, low temp deviation, 1%precision0.
- extremly low electricity consumption, the runing current is less than 100uA.
- Adopt sealt waterproof process, the product has waterproof, dustproof, shockproof, extrusion prevention, the utilization life is 2 times of the other same products.
- supportive of 8SLife Po4 Battery pack in series connection.

3.Product Picture

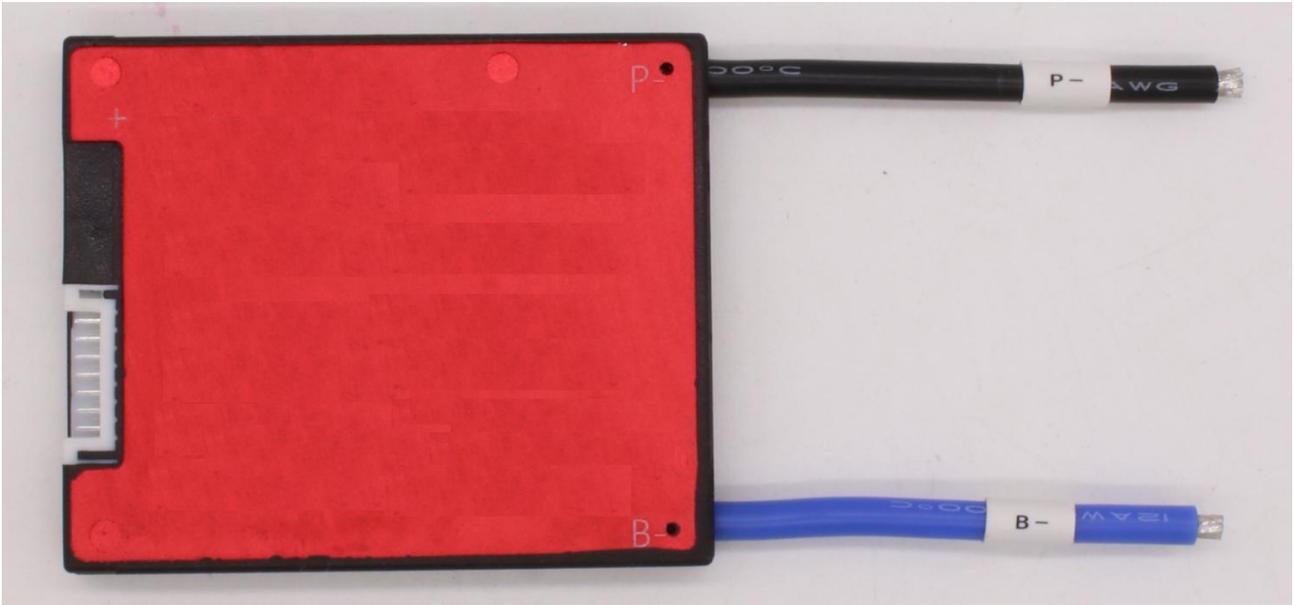


Finished product display


4. Electrical Parameters

	Description	Specification	Unite	Remarks
Discharge	Continue discharge current	60	A	
	Sparkle current	160	A	
Charge	Charge voltage	29.2	V	
	Charge current	60 (MAX)	A	
Over charge protection	Over charge detect voltage	3.65 ± 0.05	V	
	over charge protection delay	0.5	S	
	over charge release voltage	3.6 ± 0.05	V	
Balance	Balance detect Voltage	3.6	V	
	Balance release voltage	3.6	V	
	Balance current	35 ± 5	mA	
Over discharge protection	Over discharge detect voltage	2.5 ± 0.1	V	
	Over discharge detect delay	0.5	S	
	Over discharge release voltage	2.5 ± 0.1	V	
Over current protection	Over current detect voltage	200	mV	
	Over current detect delay	9	MS	
	Over current protection current	160 ± 20	A	as required
	Over current protection release condition	Off load		
Short Circuit protection	Short Circuit protection condition	Short circuit of external load		
	Short circuit detect delay	250	uS	
	Short circuit protection release condition	Off load		
Temp Protect				No
Inner Resistance	Main Circuit Conduct Inner resistance	≤ 10	mΩ	
Self Consumption	Working current	≤ 100	uA	
	Sleeping current(when in discharge)	≤ 20	uA	
Working Temp	Temp range	-20/+65	°C	

5.BMS Measurement (Unit: mm)

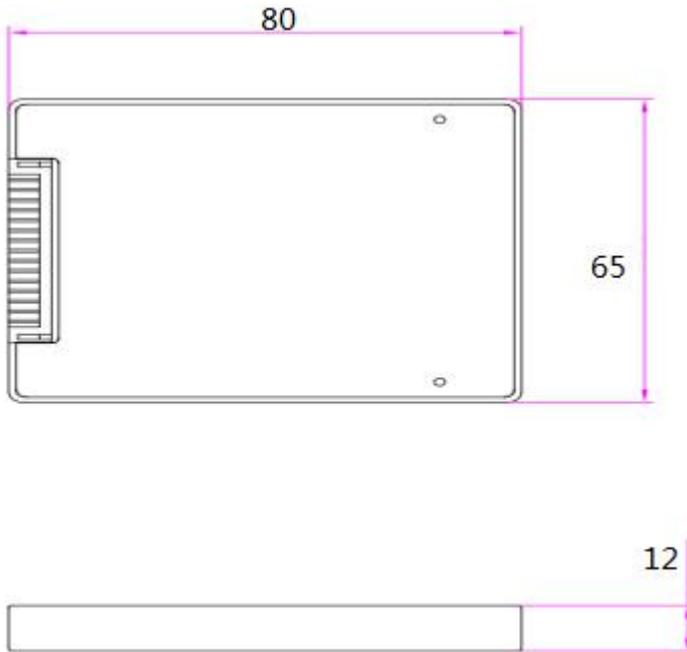

Wiring Diagram

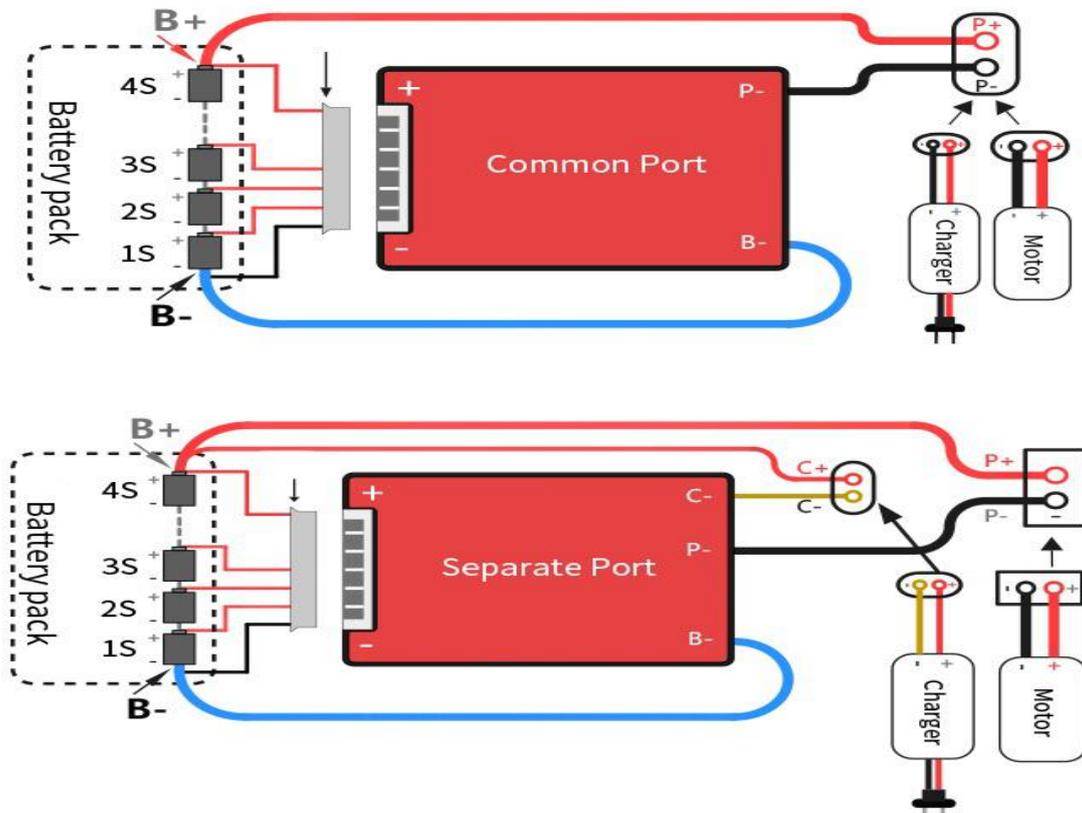

7. Operation Guidance

7.1. Special attention

1. String wires are in different standard by different manufacture, please ensure to use our gifted matched string wires
 2. Please make sure to strictly follow up with the operation sequence, if you violate the operation sequence, It may damage BMS parts, even with more serious damage.
1. First to connect BMS B⁻ wire(Thick Blue wire) to Battery Cathod
 2. Ensure not to insert string wires into BMS before string connection
 3. Connection starts from the Thin black wire B⁻, connect the second wire(thin red wire) to the first serious battery Anode, then follow the sequence to connect every cell anode, till to the last cell B⁺
 4. Complete the strings connection, please do not insert into BMS directly, but measure the voltage of every 2 closed insert end, for Li-ion battery, the voltage should be 2.8-4.2V, For Life Po4 battery, the voltage should be 2.5-3.65, For Lipo Battery, the voltage should be 1.6-2.8V
 5. When ensure string connection and voltage are all correct, then insert into BMS
 6. Then measure Voltage of Battery B⁺ and B⁻ same with Voltage of P⁺ and P⁻, if



same means BMS working normally, if not same, please recheck with the above operation process.

7. If BMS needs to be taken off from battery pack, please operate in the backward sequence.

8. Warranty

All our produced Lithium battery BMS, we guarantee 3 years warranty in quality, if the damage is caused by human improper operation, we will conduct repair with charge

9. Attention Items

- 1.Lithium battery BMS with different voltage platform can not be used mutually, eg., Life Po4 BMS can not be used for Li-ion battery
- 2.In utilization, please to make sure to Follow up the designed parameter and utilization conditions
- 3.Charge and discharge current can not be higher than the quoted current value in specification.
- 4.Please to utilize the BMS in the the regulated working temperature range, and make sure of the well heat dissipation environment
- 5.No self taking off and change parts in BMS
- 6.Our product has the function of waterproof, but still suggest avoid of long time water immersion.
- 7.We conduct Anode Oxidation process in BMS dissipation plate, but when the Oxidation layer destroyed, it still may electricity conductive, it is still suggest to avoid Dissipation plate contact with Cell and Nickel band.